

Nord Technology


Reseller of Taicenn hardware in Denmark

NORD TECHNOLOGY CONTACT INFORMATION

World Trade Center
Borupvang 3,
2750 Ballerup,
Denmark

-  **Tel.:** +45 70 27 04 15
-  **Email:** sales@nord-t.eu
-  **Website:** www.nordtechnology.dk

TAICENN TBOX-3D30

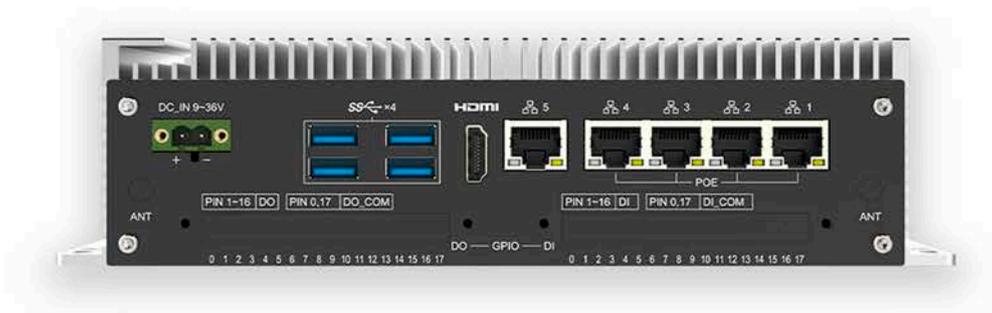

TBOX-3D30

PoE Embedded PC With Intel 12th Gen. Core i7-1255U; 5 GbE (4 PoE), 6 USB, 2 COM, 1 VGA 1 HDMI; DC 9~36V; 1 expansion slot

Version: 3.0



Features:

- Rugged & compact, fanless designed box structure;
- Intel 12th Gen. Alder Lake -U, Core i7-1255U CPU processor;
- Dual DDR5 memory, up to 64GB, 1* M.2 2280 storage slot;
- Wide DC 9~36V power input;
- 5 GbE (4 support PoE functional), optional wireless expansions;
- 4 USB3.1, 2 USB2.0, 1 HDMI, 1 VGA, 2 COM;
- 1 Mini-PCIe (Optional M.2 2230 E-Key) for wireless expansion;
- Industrial operating -20 ~ +60°C temp. range.


Specification



System	BIOS CPU CPU Ghz TDP Memory Storage Graphic Network Audio Expansion Watchdog Operating system	SPI AMI EEI BIOS Intel 12 th Gen. Core i7-1255U processor 10 (2P/8E) Cores, 12 Threads, 1.70Ghz 15W SO-DIMM, DDR5-4800 Mhz, Dual slots, Max. up to 64GB 1* M.2 M-Key 2280 (PCIe *4 Gen.IV, NVMe) slot SSD, Optional support 1* 2.5" SATA III SSD Intel Iris Xe Graphics eligible (Up to 80 EUs, 1.25Ghz) 5* Intel I226V N/A 1* Full length Mini-PCIe (Default), or 1* M.2 2230 E-key 0 ~ 256 seconds programmable Win10, Win11, Linux
IO interface	Serial port Ethernet USB Display Power input GPIO	COM1: RS232; COM2: RS485 5* RJ45, 10/100/1000 Mbps, LAN1~LAN4 support PoE 802.3AF (Single port max. up to 15.4W, total less than 45W); LAN5 support standard 10/100/1000 Mbps 4* USB3.1, 2* USB2.0, 1* HDMI, 1* VGA 1* 2 pin, phenix terminal 32* GPIO (16* DI, 16* DO, with isolated) [TBOX-3D30D model]
Structure	Box structure and surface Color Mount method Cooling system Indicator & Button Dimension Net weight	Aluminum alloy, anodizing and anti-scratch treatment Black + Silver Desktop, wall mount Big Finned aluminum heatsinks, fanless design Power switch, Power LED, HDD LED 236.5 * 150.0 * 60.0 (mm) About 1.6 KG
Power & Environmental	Operating temp. Storage temp. Humidity Vibration Shock Power input Certificate	-20 ~ + 60 (°C) -40 ~ + 70 (°C) 10 ~ 95% @ 10C (No condensation) 50 ~ 500 Hz, 1.5G, 0.15mm peak to peak 10G/Peak (11 ms) DC 9~36V CE/FCC/ROHS

Dimension

DIMENSIONAL DRAWING:TBOX-3TX0/3DX0

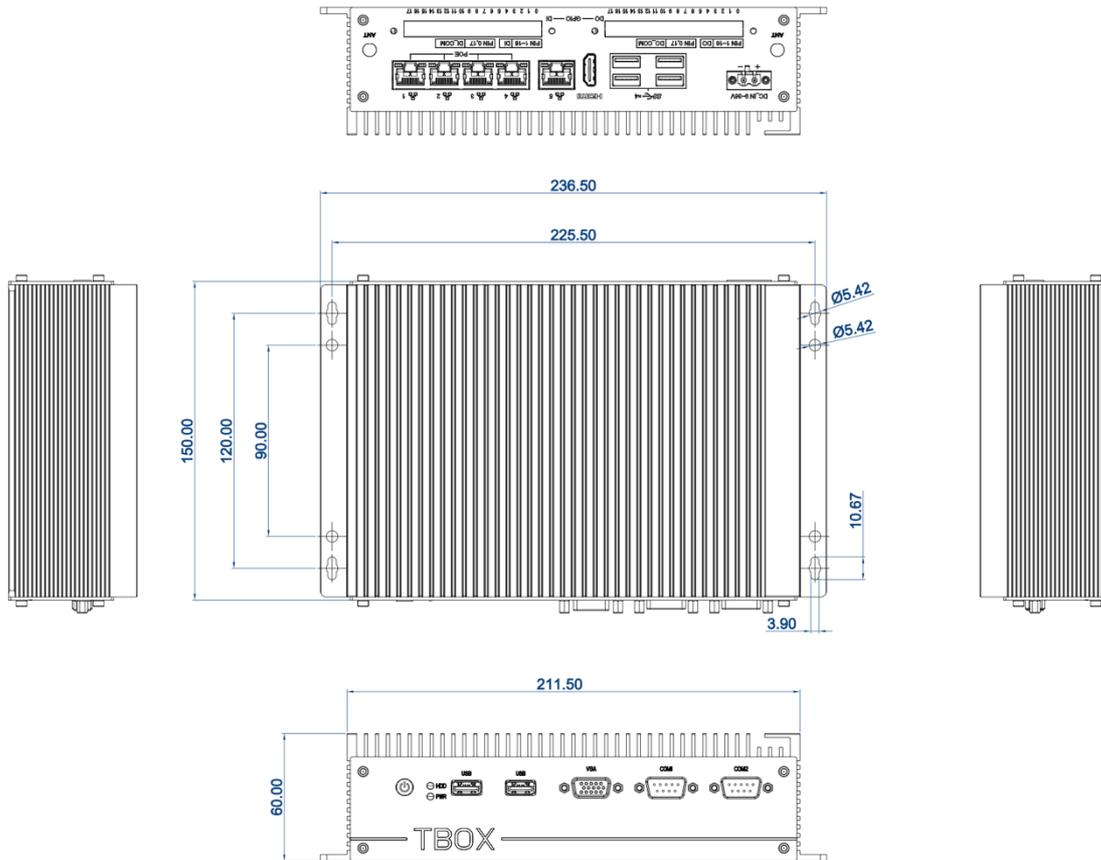

DIMENSIONS IN MILLIMETERS

TAICENN
DATE:2022.11.29
REV:A Unit:mm

Ordering information

Part no.	Description
TBOX-3D30	Intel Core i7-1255U, 5 GbE (4 PoE), 4 USB3.1, 2 USB2.0, 2 COM, 1 HDMI, 1 VGA, DC 9~36V, No GPIO, PSU
TBOX-3D30D	Intel Core i7-1255U, 5 GbE (4 PoE), 4 USB3.1, 2 USB2.0, 2 COM, 1 HDMI, 1 VGA, DC 9~36V, 32 GPIO , PSU
Optional Accessories	Description
Memory	SO-DIMM, DDR5, <u>8GB/16GB/32GB/64GB</u>
Storage	SSD: <u>256GB/512GB/1TB</u>
	Wi-Fi module, with Antenna
Wireless	Wi-Fi module with BT integrated, with antenna
	All network 4G module, with Antenna

Packing List

Description	Quantity
Standard TBOX-3D30 Box PC Product	1 piece
PSU (Power supply)	1 set
Power Cable & Plug	1 set