

Nord Technology

Distributor of hardware in Europe

NORD TECHNOLOGY CONTACT INFORMATION

World Trade Center
Borupvang 3,
2750 Ballerup,
Denmark



Tel.: +45 70 27 04 15



Email: sales@nord-t.eu



Website: www.nordtechnology.dk

Industrial monitor - NT-IMON-104



MIL-STD-461F
COMPATIBLE

IEC 60945
COMPATIBLE

MIL-DTL-38999
COMPATIBLE

MIL-STD-810G
COMPLIANT

ISO 7637-II
COMPLIANT

10.4"

Reliable monitoring at all times — in sunlight, rain, complete darkness and extremely cold or hot environment.

NIGHT VISION

ALL-WEATHER MONITOR

MODEL NO.

NT-IMON-104



DAY/NIGHT DUAL MODE DISPLAY

NVIS DEVICE COMPATIBLE

Equipped with an advanced dual-mode backlight system, this monitor allows one-touch switching between daytime mode (up to 1000 nits) or night vision mode (as low as 0.03 nits), ensuring clear visibility in bright environments and compatibility with night vision devices during nighttime operations.

 **1000** nits



 **0.03** nits

70°C

ALL-WEATHER DISPLAY BUILT-IN SMART HEATER

Stable performance in extreme environments of -30°C to +70°C.
With built-in smart heater, the monitor can operate smoothly in extremely cold environments..

-30°C





HIGH SENSITIVITY SCREEN GLOVE TOUCH

Operable with wet hands or a wide range of gloves, including rubber gloves, latex gloves, leather gloves, PVC gloves and cotton gloves, etc.



LED PANEL LIFE TIME

50000H


High quality industrial-grade LCD screen through multiple tests, giving the monitors an exceptional working life.




OPTICAL BONDING

The optical bonding process can remove the air layer between the LCD panel and the glass, ensuring that foreign objects such as dust and moisture will not damage the LCD panel. It can also reduce internal reflections on the screen to improve display transparency.

Without Optical Bonding

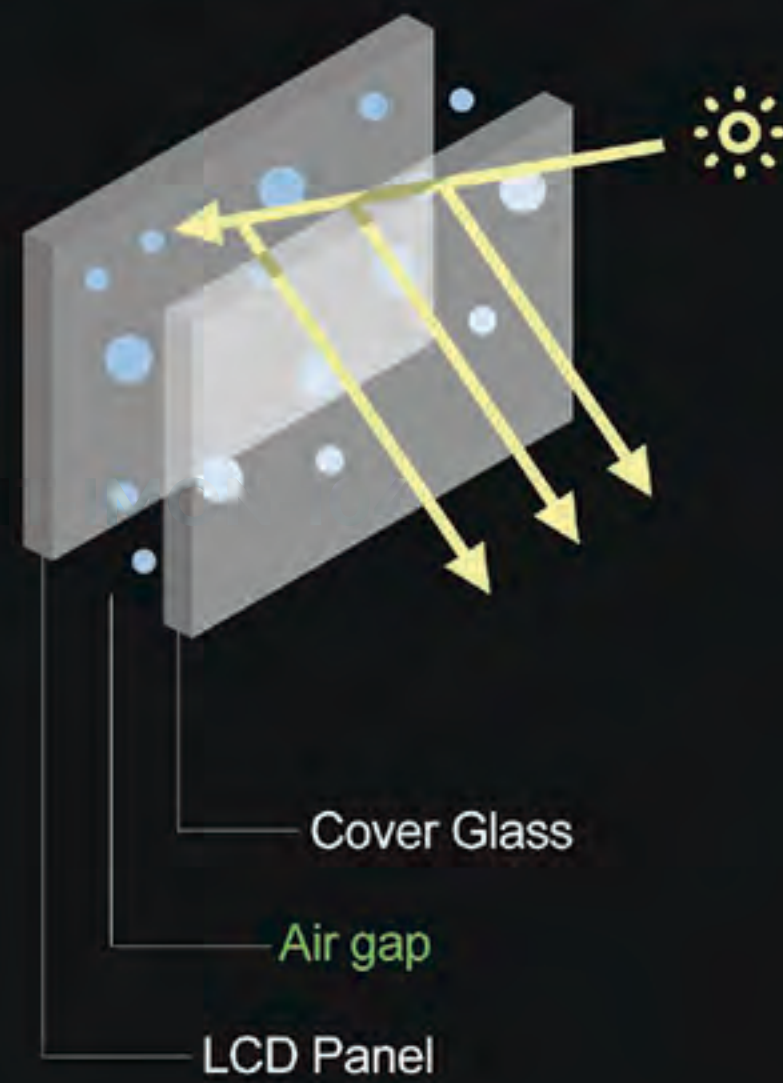

With Optical Bonding

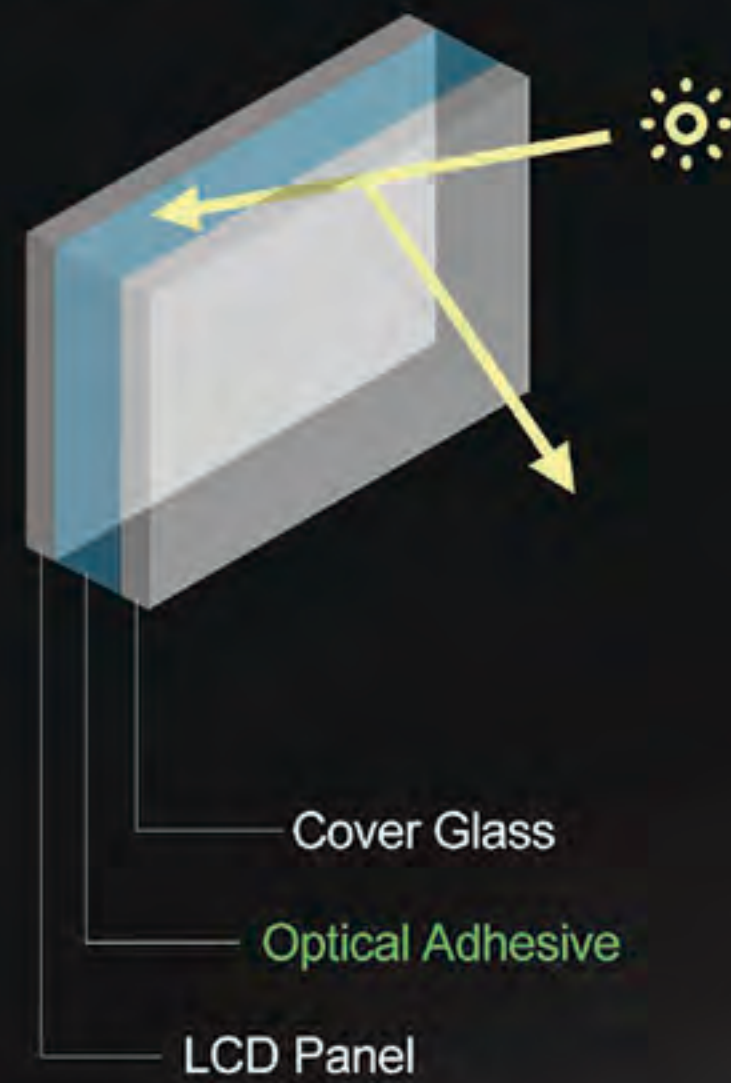


EMC PROTECTION

EMC-protected design ensures stable performance even in challenging environments.



IP65 RATING NEMA 4X

Monitor is designed to carry IP65 rating of protection which offer complete protection against particles, and a good level of protection against water projected by a nozzle against monitor from any directions.

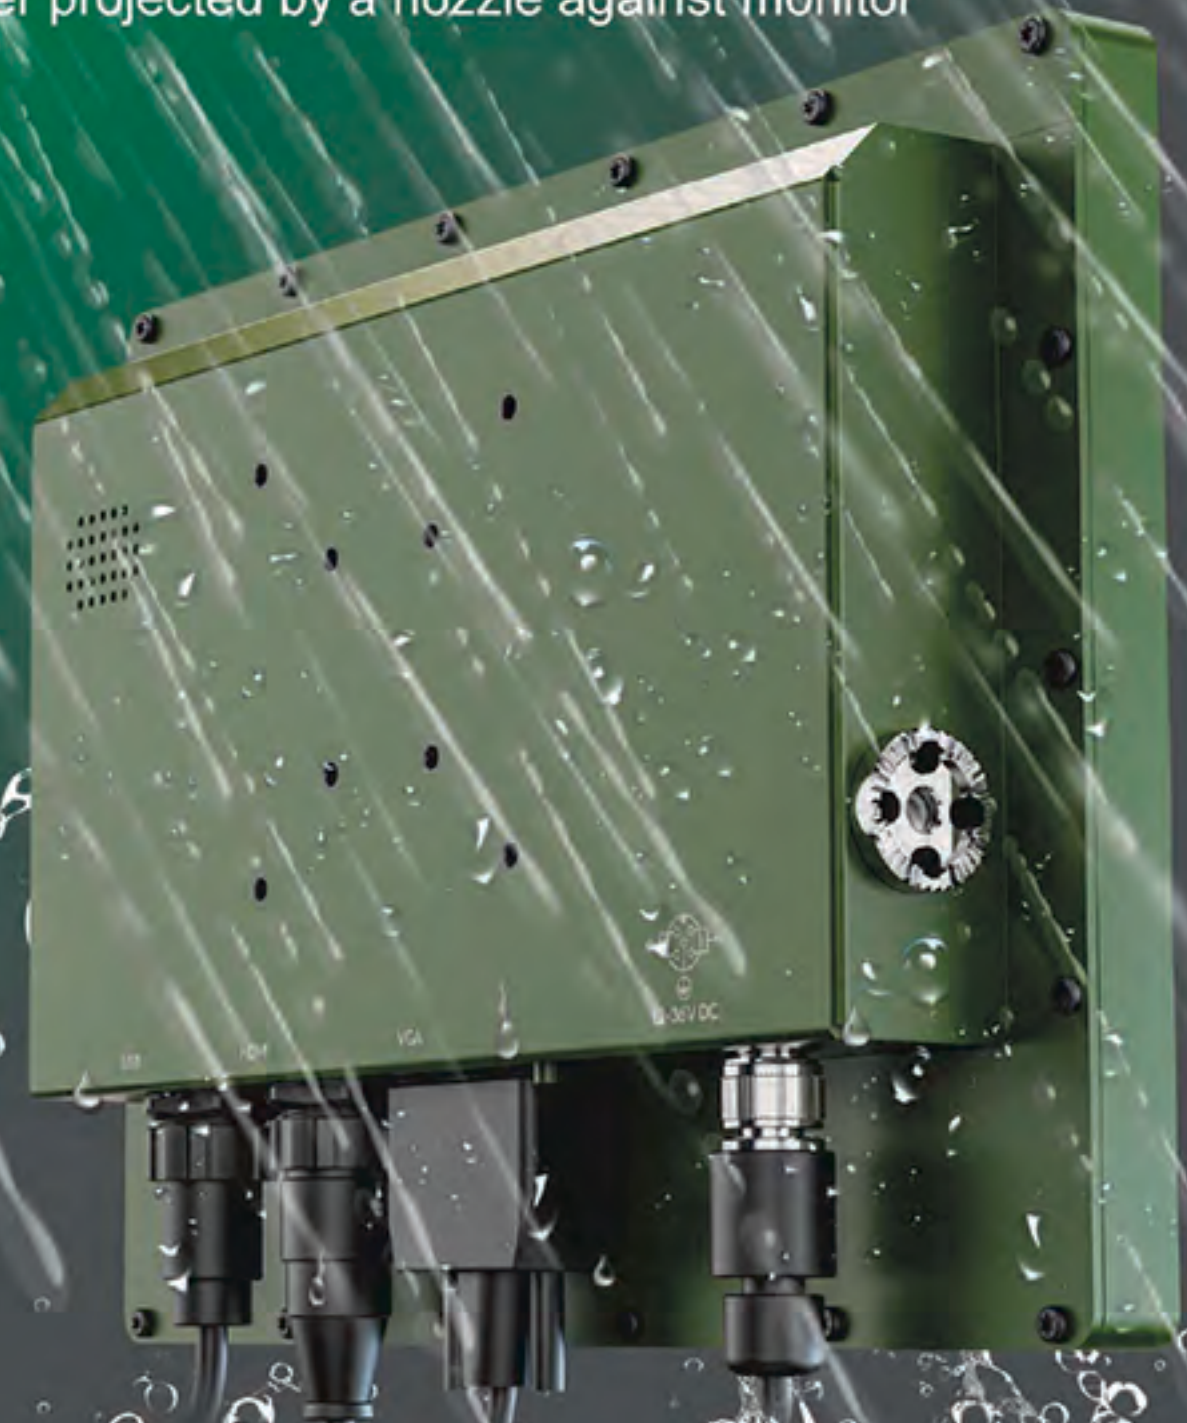


HDMI/VGA/USB SAFE AND RELIABLE INTERFACE DESIGN

Equipped with a variety of interfaces including power, HDMI, VGA, and USB. All interfaces adopt a sturdy design that is dustproof, waterproof, and anti-falling to ensure reliable connection in harsh environments.






RAM Bracket

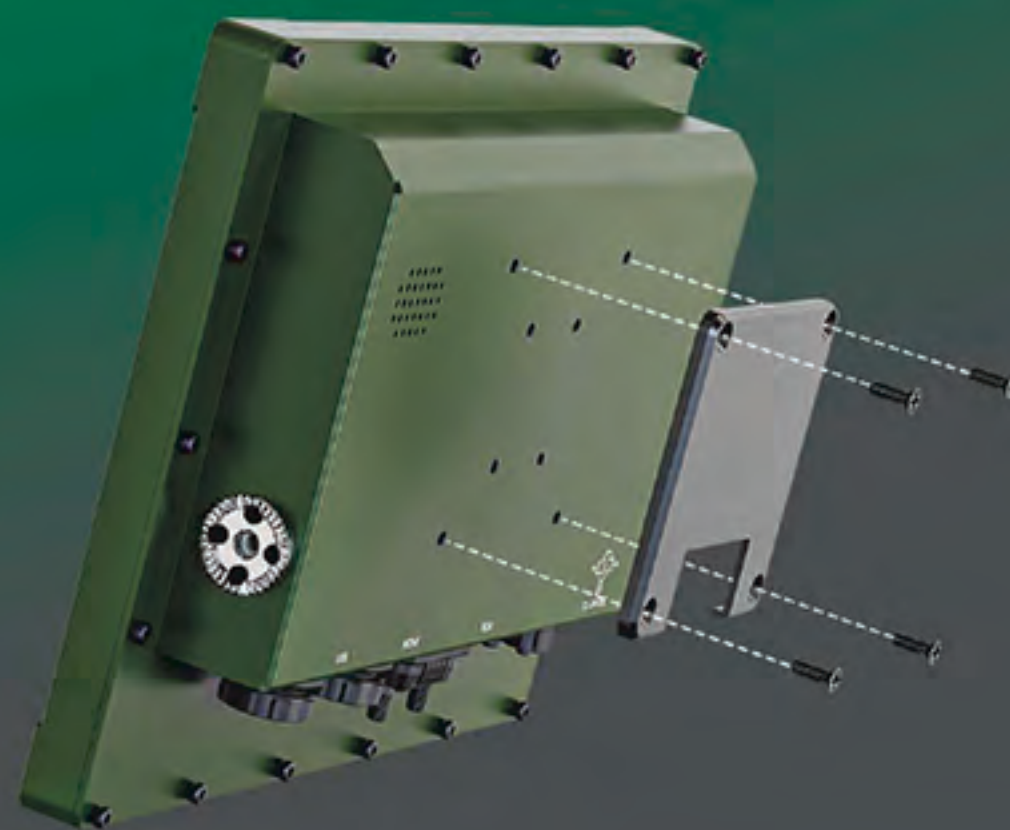

VESA 75MM

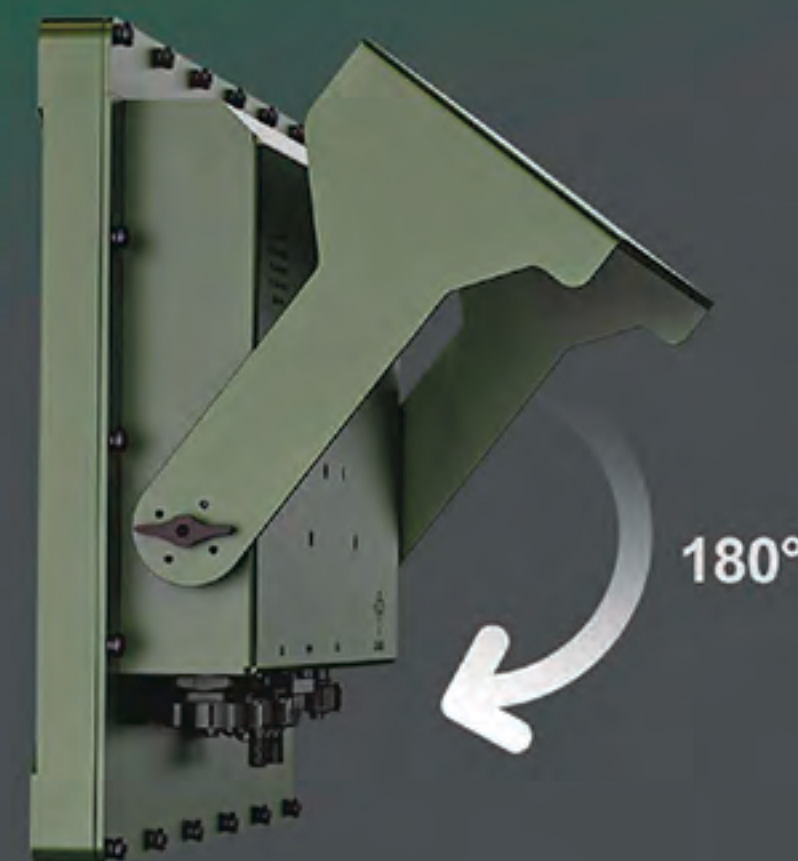

Gimbal Bracket

MULTIPLE INSTALLATION METHODS

Compatible with VESA, Gimbal bracket and RAM bracket, can be installed on desktop, wall and ceiling.
Satisfy diverse applications such as aviation, shipbuilding and extreme environments.



Maritime



Vehicle




Railway



Aircraft

Suitable for various applications such as maritime, vehicles, railway, aircraft and extreme industrial environments.

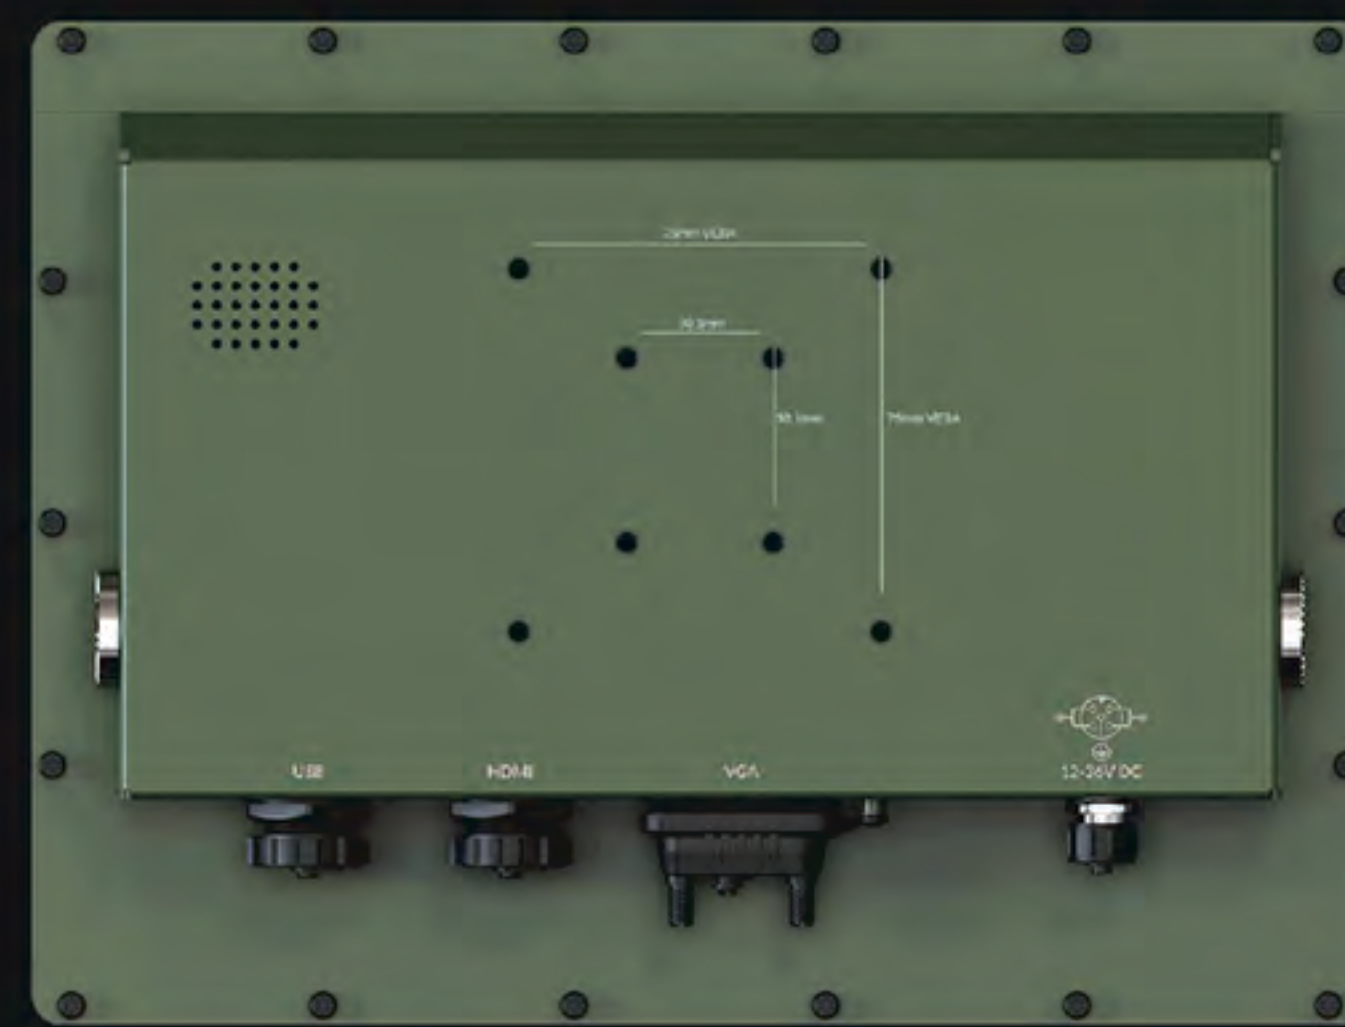

SPECIFICATIONS

DISPLAY	Touch Screen	5-wire resistive touch+AG Capacitive touch+AG+AF(Optional) EMI Glass(Customizable)
	Panel	10.4" LCD
	Physical Resolution	1024×768
	Brightness	Day Mode:1000nits NVIS Mode:Dimmable under 0.03nit
	Aspect Ratio	4:3
	Contrast	1000:1
	Viewing Angle	170°/ 170°(H/V)
	LED Panel Life Time	50000 Hours
SIGNAL INPUT	HDMI	1
	VGA+AUDIO	1
	USB	1×USB-A (For touch and upgrade)
SUPPORTED FORMATS	VGA	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60, 720p 50/60...
	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
AUDIO INPUT	HDMI	2ch 24-bit
	Built-in Speakers	1
POWER	Input Voltage	DC 12-36V
	Power Consumption	≤13W (15V, Normal mode) ≤ 69W (15V, Heating mode)
ENVIRONMENT	Protection Rating	IP65, NAME 4X
	Operating Temperature	-30°C~70°C
	Storage Temperature	-30°C~80°C
OTHER	Dimension(LWD)	276mm × 208mm × 52.5mm
	Weight	2kg (With Gimbal Bracket)

Note: Due to constant effort to improve products and product features, specifications may change without notice.

ACCESSORIES



Power Connector Cable



VGA+AUDIO Cable



HDMI A/A Cable



USB A/ACable



Gimbal Bracket