

Nord Technology

Distributor of JHCTECH hardware in Europe

NORD TECHNOLOGY CONTACT INFORMATION

World Trade Center
Borupvang 3,
2750 Ballerup,
Denmark

 **Tel.:** +45 70 27 04 15
 **Email:** sales@nord-t.eu
 **Website:** www.nordtechnology.dk

ALAD-151T/T(P)



ALAD-151T/T(P)




Key Features

- 15-inch XGA TFT LCD with LED backlight
- 5-wire resistive screen/projected capacitive screen
- Aluminum alloy integrated die-casting structure with natural streamlined design
- 1*HDMI, 1*VGA, 1*Audio, 1*USB
- Built in multilingual OSD, DC 10-30V power input
- Full flat panel, IP65 protection level
- Supports VESA 100 * 100mm and panel installation

Overview

ALAD-151T/ (P) is a sturdy and reliable industrial display, featuring a 15-inch 1024*768 high-resolution TFT LCD screen with clear and bright images, suitable for various lighting environments. The entire body is made of aluminum alloy integrated die-casting, with a sturdy structure and streamlined aesthetics. The full flat panel and IP65 protection level are not afraid of dust, splashes, and daily impacts, making it suitable for installation in multiple scenarios such as factories, outdoors, and healthcare.

I/O outlets

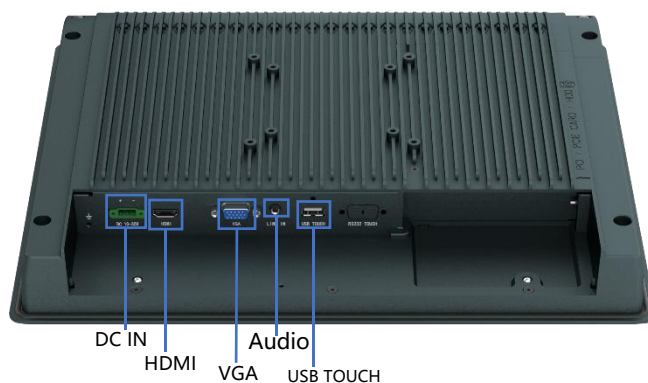

SPEC.

DISPLAY

LCD	15" TFT LED
Resolution	1024*768(XGA)
Brightness	400 (cd/m2) /1000 (cd/m2) optional
LCD Max.colors	16.2M
Contrast Ratio	800:1
Pixel Pitch	0.297 (H)×0.297 (V)
Viewing Angle	80° (left) , 80° (right) , 80° (up) , 80° (down)
Backlight Lifetime	50000Hrs

TOUCH

Type	5-wires resistive touch screen Projected capacitive touch screen	
Light Transmission	80%	90%
Power consumption	+5V @200mA	+5V @300mA
Click Lifetime	30 million times	35 million times

SYSTEM

I/O	1*HDMI, 1*VGA, 1*Audio, 1*USB, 2*2W(4Ω) (Optional)
OSD	AUTO/ Power/ Menu/ Source/ UP (LEFT)/ DOWN (RIGHT)
OSD language	Chinese, English, German, French, Russian, Italian, Spanish, Arabic, Persian, etc
Power	DC 10-30V
IP level	IP 65 Compliant Front Panel

HDMI 1.3	1920*1080@60Hz
VGA	Conventional
LED	Green for display, red for standby mode
EMC	CE, FCC Class A


AUDIO

Frequency response	±3dB
Channel separation	70dB(L&R)
Distortion (THD)	1.5~2%
Sex to Noise Ratio (S/N)	80dB

Institutions and Environment

Construction	Aluminum alloy die-casting molding, full flat panel
Exterior color	Granite Grey
Installation method	Panel installation, VESA 100*100mm, 75*75mm
Size	(W*H*D): 380*315*56mm; panel installation (W*H): 367.3*303.3mm
Net weight	4.30KG
Operating Temperature	-20~70°C
Storage temperature	-20°C~80°C
Storage humidity	10~95% @ 40 ° C, no condensation
Vibration	1g 5~500Hz
Shock	10g peak acceleration(Duration 11ms)

Dimension

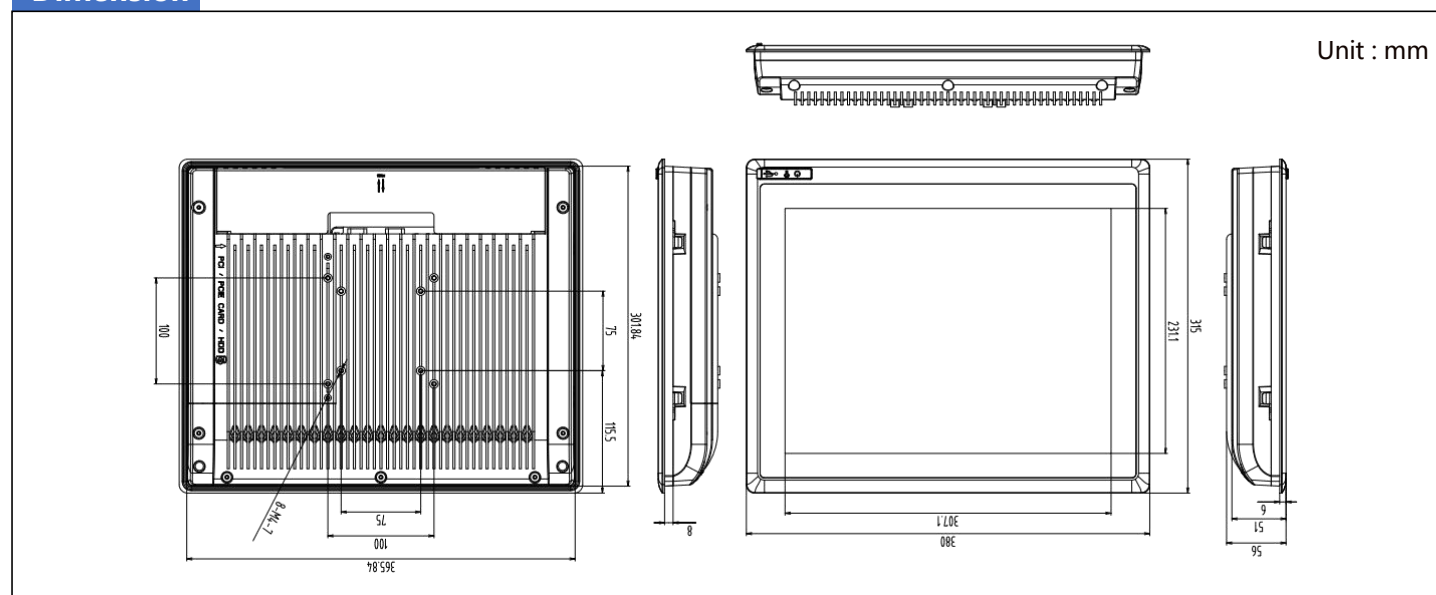

Ordering Info

No.	Touch Screen	Description
ALAD-151T/S001-G	5-wires resistive touch screen	Industrial touch display, 15" TFT LCD, IP65 protection level, 1*HDMI, 1*VGA, 1*Audio in, 1*USB TOUCH, Multi language OSD, DC 10-30V power supply.
ALAD-151T(P)/S001-G	Projected capacitive touch screen	
PA-60DC12	AC/DC power adapter, DC 12V/5A 60W	